


 (\mathbf{R})

Internal LED Lighting

Square D[®] Panelboards Up to 72 Circuits

Rubber insulated pipe



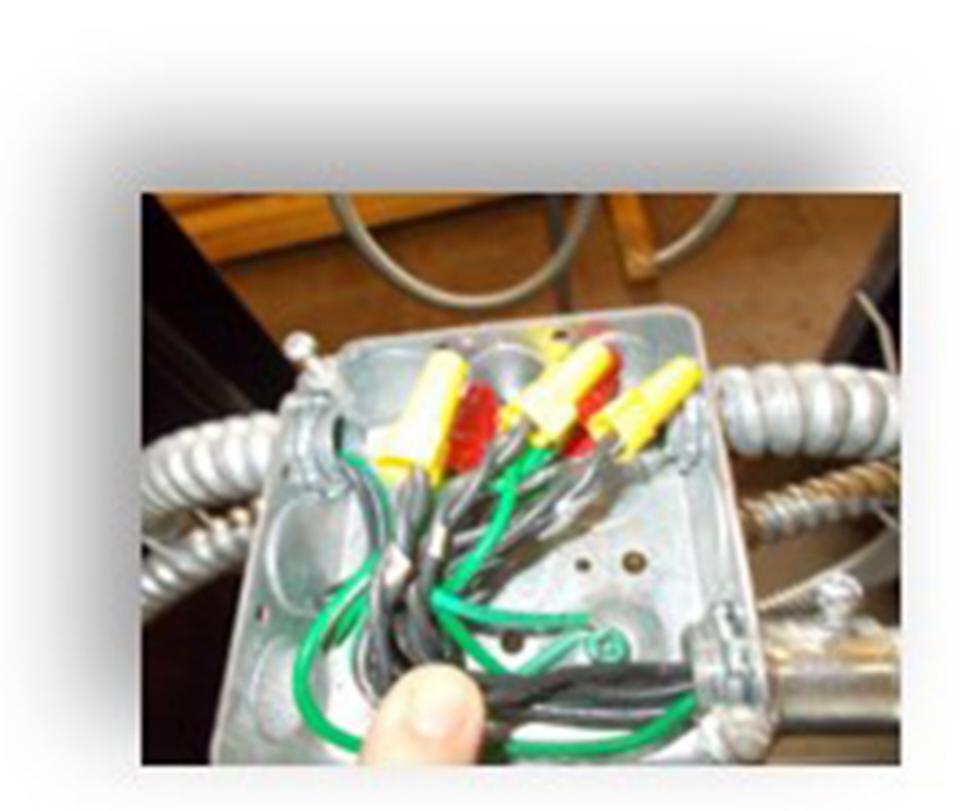

Detailed wire labeling for easy final installation

hangers prevent galvanic corrosion

and identification.

1.5" or 2"Type L Copper Water Lines

Brass 3/4" Quarter Turn Lead Free Ball Valves

Frame & Covering



12-Gauge 1-5/8" UNISTRUT[®] supports



16-Gauge Galvanized Steel Tubing



Welded steel frames for superior strength and durability.





Custom fit fiberglass tops, side panels, and doors for dependable moisture protection inside and out.





Features & Benefits

• Troughs can be manufactured to any desired custom length.

• Dual Lint Filters to prevent drains from clogging.

• The Drain Outlet can be installed on the front, sides or bottom.

 Troughs come standard with a lid to reduce odors and prevent water splash out.

• The Lid is suitable for pedestrian traffic.

- Lid helps to contain excess suds.
- Troughs havea built-in slope towards the drain.

 Washing machine discharge drains can be installed in the top or sides.

Built-in Slope

by CACO MFG CORP



Patent Pending Drain Trough System

Easy flip lid to access & clean the dual lint filters Lid Flip-up Lid **Dual Lint Filters** Welded Side Drain **Rubber Coupling PVC** Pipe **PVC Elbow Finished Floor** (Patent Pending)



Fiberglass Suspended Ceiling Fixtures

Available in your choice of color


LED lighting option available


Highlight & accent traffic zones

Sturdy UNISTRUT[®] mount

47" x 96" x 4"


Functional & decorative

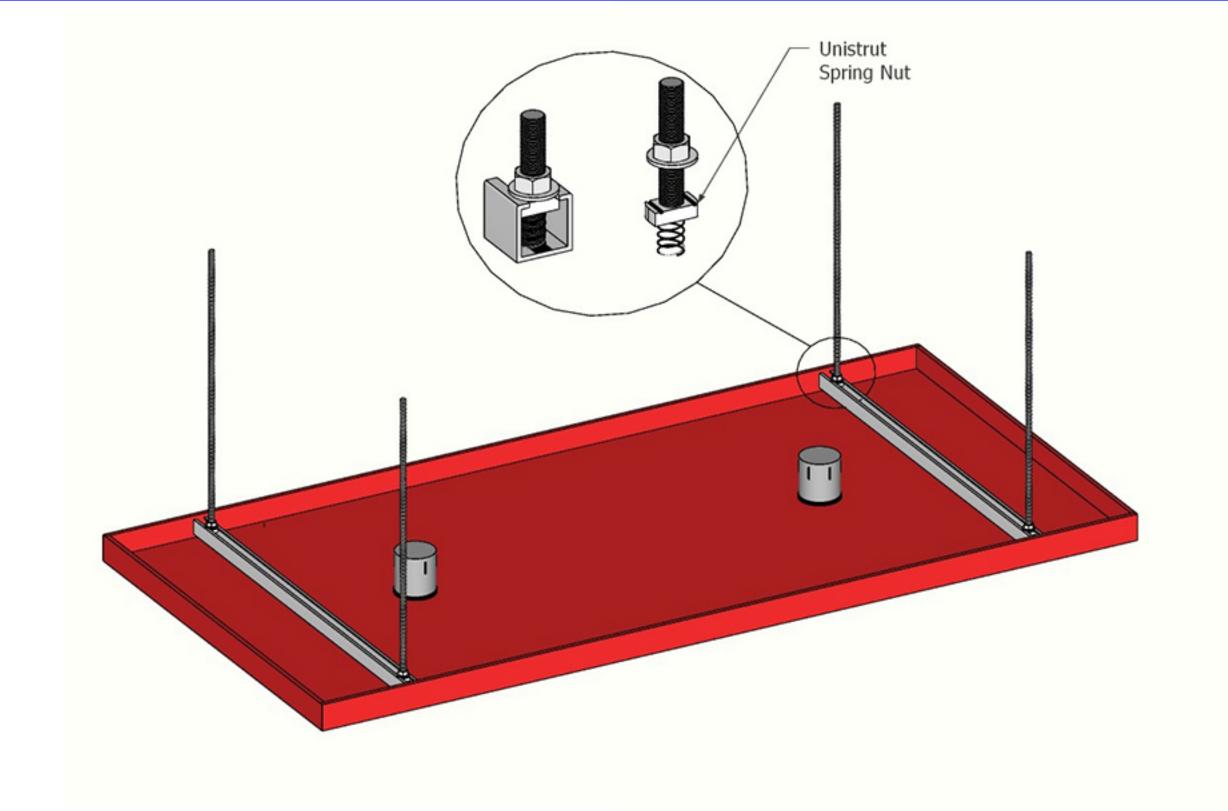


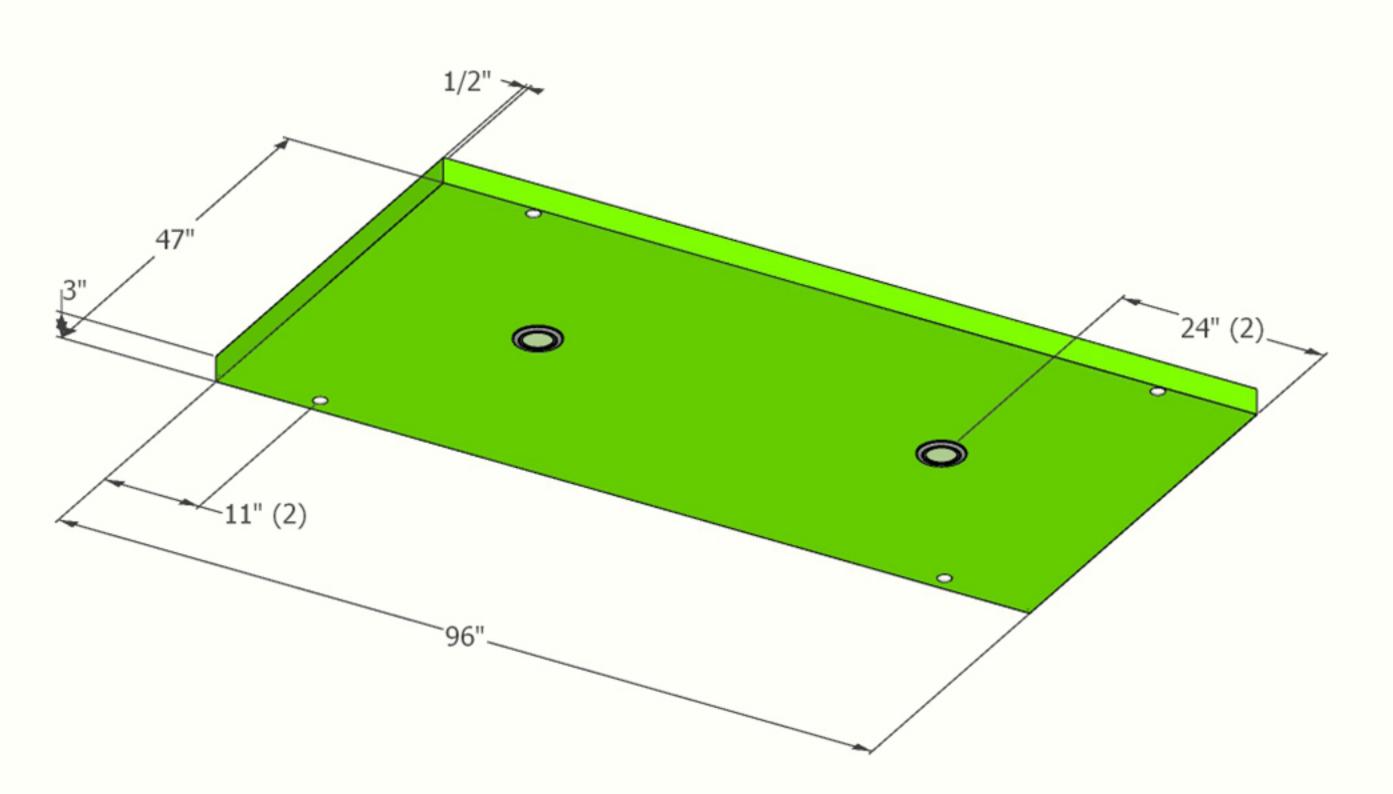





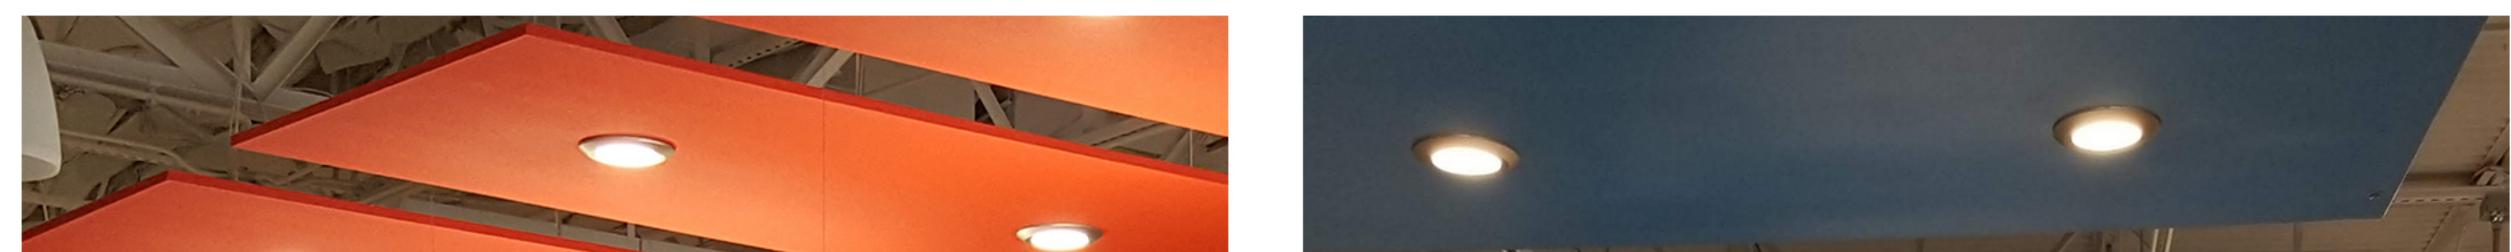

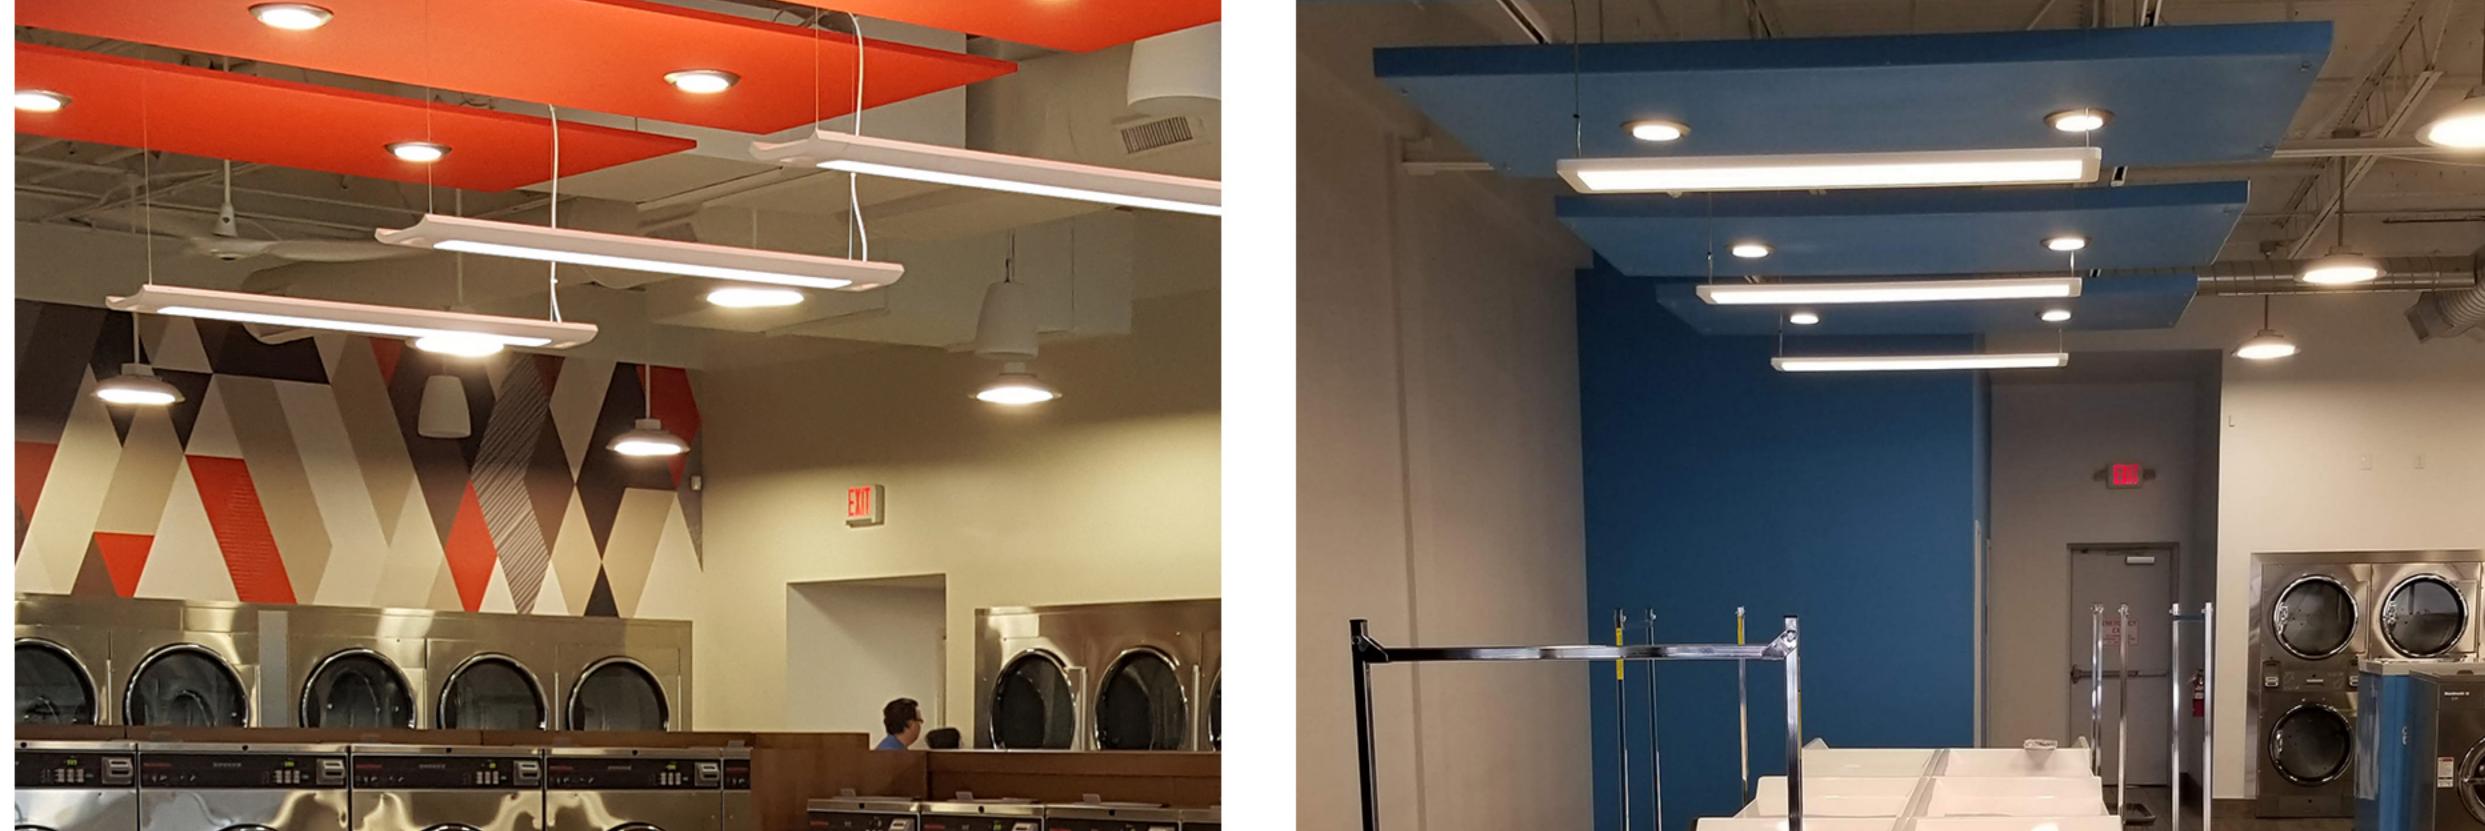

CACO MFG CORP PO Box 263129 Houston, TX 77207

Phone 713.644.1973 Fax 713.644.8490

www.Solomatic.com Email: sales@solomatic.com